



# Eyewash



## Portable Emergency Eyewash Station

- » No plumbing required, mounting bracket included
- » One-hand operation
- » Holds 9 Gal of water
- » 15 minute flow time
- » Locking cap (lock not included)
- » Meets ANSI Z358.1

ITEM #	ORDER #	DESCRIPTION	UOM
5134-00	G7350006	Eyewash Station	EA



5134-00



32-000454-0000

## Honeywell

### Eyesaline® Personal Eyewash Bottles

- » Portable and ready to use
- » Sterile, buffered, saline is superior to tap water for emergency eye care
- » User controls delivery of drops or an irrigating stream of solution
- » Three-year shelf life from manufacture date
- » English/Spanish

ITEM #	ORDER #	DESCRIPTION	UOM
32-000451-0000	34150105	1 oz. Bottles	4/Cs
32-000454-0000	341501071	16 oz. Bottles	EA
32-000455-0000	341501081	32 oz. Bottles	EA



32-000461-0000

## Honeywell

### Eyesaline® Wall Eyewash Station

- » No plumbing required, mounting bracket included
- » Highly visible and available for emergency flushing
- » Designed for easy “snap-out” access to eyewash
- » Features bilingual (English/Spanish) instructions
- » Meets ANSI Z358.1

ITEM #	ORDER #	DESCRIPTION	UOM
--------	---------	-------------	-----

#### Single Wall Station

32-000460-0000	341501091	16 oz. Bottle	EA
32-000461-0000	341501101	32 oz. Bottle	EA

#### Double Wall Station

32-000465-0000	34156501	16 oz. Bottles	CS
32-000462-0000	341501111	32 oz. Bottles	EA



32-000462-0000

## Honeywell

### Fendall Pure Flow 1000® Eyewash Station

- » No plumbing required
- » Delivers 15 minutes of flushing
- » Factory sealed cartridges for easy of use
- » Integral fluid reservoir captures waste fluid
- » Easy-view window
- » Meets ANSI Z358.1

ITEM #	ORDER #	DESCRIPTION	UOM
32-001000-0000	341554681	Eyewash Station, English	EA
32-001050-0000	341500791	Refill Cartridges, Trilingual	PR



32-001050-0000



32-001000-0000



# Eyewash

## Honeywell

### Fendall Porta Stream® I Eyewash Station

- » Delivers 6 minutes of uninterrupted, hands-free flushing
- » Gravity-fed flow begins immediately when the nozzle pull strap is removed
- » No plumbing required
- » Portable
- » Includes 70 oz. saline concentrate
- » Large fill hole



32-000100-0000

ITEM #	ORDER #	DESCRIPTION	UOM
32-000100-0000	341500761	Eyewash	EA



32-000200-0000

## Honeywell

### Fendall Porta Stream® II Eyewash Station

- » Offers versatile portability and 15 minutes of uninterrupted flushing
- » Gravity-fed flow begins immediately when the nozzle pull strap is removed
- » No plumbing required
- » Large fill hole w/lockable fill cap
- » Includes 180 oz. saline concentrate
- » Meets ANSI Z358.1

ITEM #	ORDER #	DESCRIPTION	UOM
32-000200-0000	341500881	Eyewash Station w/ Saline Concentrate	EA

## Honeywell

### Eyesaline® Replacement Saline Solutions

- » For use to refill Porta Stream eyewash stations
- » Concentrate (10:1) or premixed (ready to use)
- » 30-month self life, 6-months once opened from manufacture date



32-000502-0000

ITEM #	ORDER #	DESCRIPTION	UOM
32-000502-0000	341501141	1 Gal Premix - Ready to Use	EA
32-000513-0000	341501171	180 oz. Concentrate	EA
32-000509-0000	341501151	70 oz. Concentrate	EA



# Eyewash



## AquaGuard Gravity-Flow Portable Eyewash, 16 Gal

- » Self-contained 16 Gal gravity-flow eyewash unit is ideal for use in low traffic areas, and where a continuous supply of potable water is unavailable for plumbed units
- » Rugged plastic tank
- » Built-in carrying handle
- » Furnished with bracket for optional wall mounting
- » Meets ANSI Z358.1-2014

ITEM #	ORDER #	DESCRIPTION	UOM
G1540	B73101151	Eyewash Station	EA
G1540HTR	B7311546	Eyewash Station with Heated Orange Insulation Jacket	EA



G1540



## 15 Gal Portable Eyewash/Drench Hose Units

- » Self-contained units for use in low traffic areas and where a continuous supply of potable water is unavailable for plumbed units
- » Provides 10 usable Gal (37.9 L) for effective rinsing of eyes, face or body for 15 min
- » Pressure regulator controls eyewash flow to 0.65 GPM for 15 min
- » Two eyewash spray heads have flip top dust covers, flow control and filter
- » Hand held drench hose unit has spray head, squeeze handle and 6' hose
- » Unit has built-in carrying handles
- » Bacteriostatic additive supplied with unit
- » Meets ANSI Z358.1-2014 for eyewashes

ITEM #	ORDER #	DESCRIPTION	UOM
G1562	B7311562	Eyewash/Drench Hose Unit	EA
G1562HTR	B7311547	Eyewash/Drench Hose Unit w/Heated Jacket	EA
G1562DLY	B7310358	Stainless Steel Dolly w/Lockable Casters	EA



G1562HTR

G1562



## EyeSafe™ and EyeSafe-X™ Faucet-Mounted Eyewash Stations

- » Converts any faucet into an emergency eyewash station
- » Won't interfere with normal faucet operation
- » Angle of outlet heads are adjustable to permit full coverage and avoid splashing
- » Dust covers protect outlet heads
- » Pull knob activates eyewash
- » Inlet body has 0.859375"-27 female thread and comes with three adaptors to install on most faucets
- » Removable aerator at outlet is furnished
- » Completely assembled



G1101



G1100

ITEM #	ORDER #	DESCRIPTION	UOM
G1100	B73101021	EyeSafe Faucet-Mounted Eyewash Station	EA
G1101	B73101031	Eye-Safe-X Faucet-Mounted Eyewash Station, Gooseneck Version	EA



# Eyewash



## Wall Mounted Eyewash Stations

- » Two GS-Plus™ spray heads with flow control and filter
- » Aluminum flag run/handle
- » Valve: 0.5" IPS brass stay-open ball valve with PTFE seals
- » Supply inlet: 0.5" NPT female
- » Waste outlet: 1.25" NPT female
- » Heavy duty cast aluminum wall bracket with powder coated finish
- » Fully assembled and tested
- » ANSI-compliant sign included



G1814



G1814BC



ITEM #	ORDER #	DESCRIPTION	UOM
G1814	B73102031	Eyewash Station w/ Stainless Steel Bowl	EA
G1814P	B73102041	Eyewash Station w/ ABS Plastic Bowl	EA
G1814BC	B73111141	Eyewash Station w/ Stainless Steel Bowl and Cover	EA



## Wall Mounted Eye/Face Wash Stations

- » Two FS-Plus™ spray heads with flow control and filter
- » Aluminum flag run/handle
- » Valve: 0.5" IPS brass stay-open ball valve with PTFE seals
- » Supply inlet: 0.5" NPT female
- » Waste outlet: 1.25" NPT female
- » Heavy duty cast aluminum wall bracket with powder coated finish
- » Fully assembled and tested
- » ANSI-compliant sign included



G1750



G1750BC



ITEM #	ORDER #	DESCRIPTION	UOM
G1750	B73101661	Eye/Face Wash Station w/ Stainless Steel Bowl	EA
G1750P	B73101671	Eye/Face Wash Station w/ ABS Plastic Bowl	EA
G1750BC	B7310332	Eye/Face Wash Station w/ Stainless Steel Bowl and Cover	EA



G1750P



G1825

G1825BC



## Free Standing Pedestal-Mounted Eyewash Stations

- » Two GS-Plus™ spray heads with flow control and filter
- » Aluminum flag run/handle
- » Pipe/fittings: Schedule 40 galvanized steel. Furnished with orange polyethylene pipe covers
- » Supply inlet: 0.5" NPT female
- » Waste outlet: 1.25" NPT female
- » ANSI-compliant sign included

ITEM #	ORDER #	DESCRIPTION	UOM
G1825	B73102101	Eyewash Station w/ Stainless Steel Bowl	EA
G1825P	B73102121	Eyewash Station w/ ABS Plastic Bowl	EA
G1825BC	B7311825	Eyewash Station w/ Stainless Steel Bowl and Cover	EA



# Eyewash

## Guardian

### Deck/Sink Mounted Eyewash Station

- » Spray heads swivel 90° from storage to operational position
- » Two GS-Plus™ spray heads with “flip top” dust covers, flow control and filter
- » Unit can be installed on deck next to sink on right side (G1806) or left side (G1806LH)
- » Aluminum flag run/handle
- » Valve: 0.5" IPS brass stay-open ball valve with PTFE seals
- » Supply inlet: 0.5" NPT male
- » Fully assembled and tested
- » ANSI-compliant sign included



G1806

ITEM #	ORDER #	DESCRIPTION	UOM
G1806	B73101981	Eyewash Station 90° Swivel, Right Hand Mount	EA
G1806LH	B73101991	Eyewash Station 90° Swivel, Left Hand Mount	EA

## Guardian

### Eyewash/Drench Hose Stations

- » Dual purpose eyewash/drench station for wall mounting (G5026) or deck mounting (G5022)
- » Meets ANSI Z358.1-2014 as both an eyewash and drench hose
- » Fixed position use or hand held hose for use to rinse any part of the body
- » Two GS-Plus™ spray heads with “flip top” dust covers, flow control and filter
- » 8' reinforced PVC hose
- » Fully assembled and tested
- » ANSI-compliant sign included

ITEM #	ORDER #	DESCRIPTION	UOM
G5026	B73102851	Deck Mounted	EA
G5022	B73102811	Wall Mounted	EA



G5026

G5022

# Showers & Eyewash

## Guardian

### Emergency Shower Stations

- » 10" orange ABS plastic shower head with stainless steel actuating arm and 29" pull rod
- » Vertically mounted (G1635) or horizontally mounted (G1643)
- » 1" IPS brass stay-open ball valve with PTFE seals
- » Supply inlet: 1" NPT female
- » ANSI-compliant sign included



G1635

G1643

ITEM #	ORDER #	DESCRIPTION	UOM
G1635	B73101271	Vertically Mounted	EA
G1643	B73101311	Horizontally Mounted	EA




# Showers & Eyewash



## Shower Safety Stations with Eyewash

- » Combination overhead shower and separate eyewash station
- » 10" orange ABS plastic shower head with stainless steel actuating arm and 29" pull rod
- » Shower Valve: 1" IPS brass stay-open ball valve with PTFE seals
- » Two GS-Plus™ spray heads with flow control and filter for eyewash station
- » Eyewash valve: 0.5" IPS brass stay-open ball valve with PTFE seals
- » Pipe/fittings: Schedule 40 galvanized steel. Furnished with orange polyethylene pipe covers
- » Supply inlet: 1.25" NPT female top or side
- » ANSI-compliant sign included

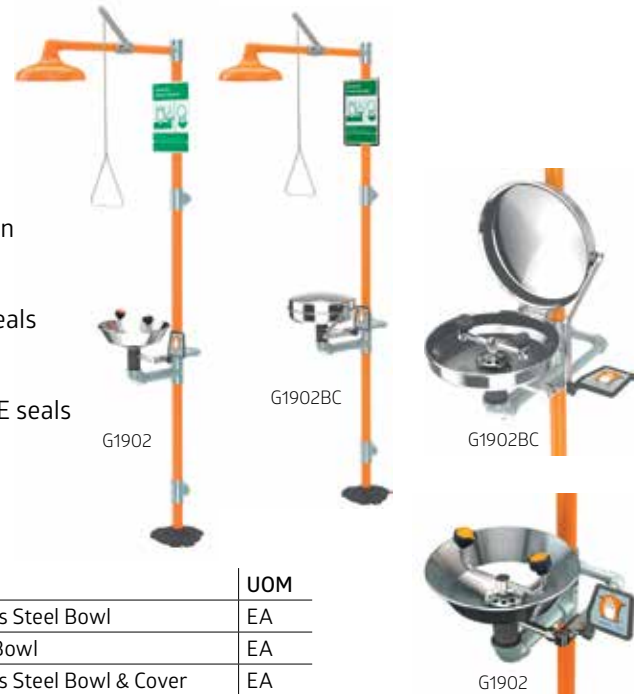

ITEM #	ORDER #	DESCRIPTION	UOM
G1902	B7311903	Shower Safety Station & Eyewash w/ Stainless Steel Bowl	EA
G1902P	B7311902	Shower Safety Station & Eyewash w/ Plastic Bowl	EA
G1902BC	B73103251	Shower Safety Station & Eyewash w/ Stainless Steel Bowl & Cover	EA



## Heated Shower Safety Station with Eyewash

- » Heated combination overhead shower and separate eyewash station
- » Electric heat-traced station prevents freezing even in extreme conditions
- » Unit is fully wired at factory. Requires 120 VAC single phase power supply
- » Intended for cold weather use down to -40°F
- » 10" orange ABS plastic shower head with stainless steel actuating arm and 29" pull rod
- » Shower valve: 1" IPS brass stay-open ball valve with PTFE seals
- » Freeze-resistant spray head assembly with float-off dust covers and internal flow control
- » Eyewash valve: 0.5" IPS brass three-way self-draining stay-open ball valve with PTFE seals
- » Pipe/fittings: Schedule 40 galvanized steel. Furnished with orange polyethylene pipe covers
- » Supply inlet: 1.25" NPT female top
- » ANSI-compliant sign included

ITEM #	ORDER #	DESCRIPTION	UOM
GFR3100	B7313100	Heated Overhead Shower with Separate Eyewash Station	EA